



VG-6717 Digital Monitor Interface

P-Code: 010101015

V-GREAT GLOBAL CORPORATION

Second Floor, Capital City, Independence Avenue, P.O. Box 1008, Victoria, Mahe, Seychelles

FEATURES


- * **Electronic Addressing**
- * **Dual-LED for the indications of three status**
- * **Open-circuit check on Input line as option**
- * **No external power supply required**
- * **Plug-in structure design for easy installation**
- * **LPCB approval to EN54-18**





DESCRIPTION

VG-6717 Digital Monitor Interface is connected with firefighting equipment to monitor action status. When the supervised unit is activated or status changed, the interface can transmit the status or feedback to the Digital FD&A Panel, via the passive contacts inside. It has two visible indicators available for the indications of Operate, Input and Fault. Moreover, the function of monitor the open-circuit fault on input line, can be switched on or off as needed. VG-6717 is normally applied to connect with equipments, such as water flow indicator, pressure switch, manual valve, exhaust valve and other alarm valves as well.

DIMENSION

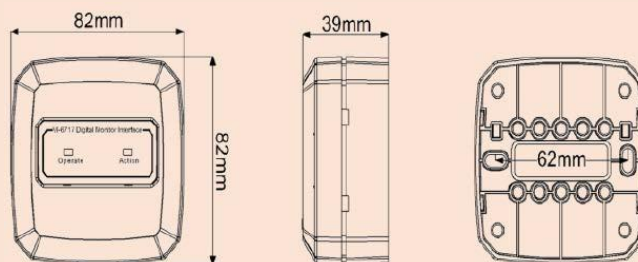

WIRING INSTRUCTION

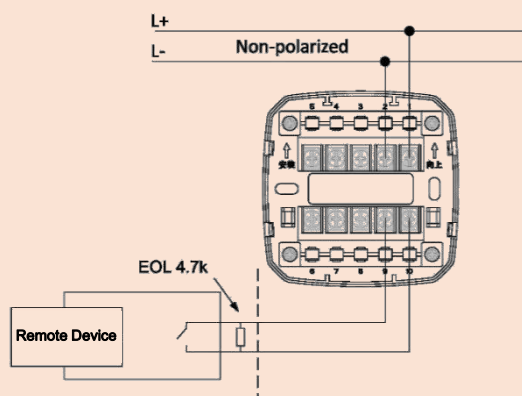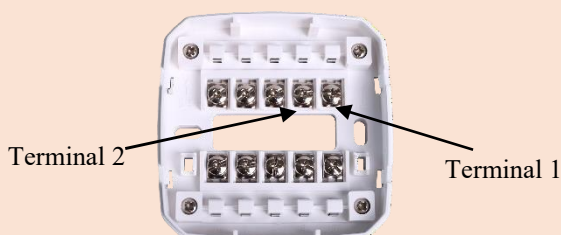

TECHNICAL DATA

Operating Voltage	16VDC-28VDC	Input	Passive contacts
Standby Current	$\leq 0.5\text{mA}$	Humidity	$\leq 95\%$, non-condensing
Alarm Current	$\leq 1.0\text{mA}$	Wiring	non-polarized
Temperature range	$-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$	Weight	110.1g (with base)
Installation	Wall-mount	Base	VG-6618